

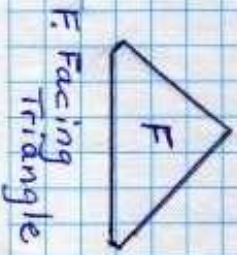
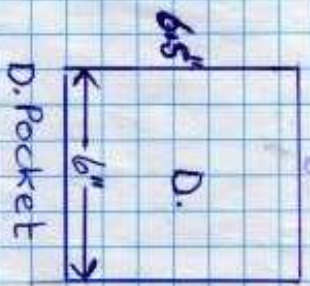
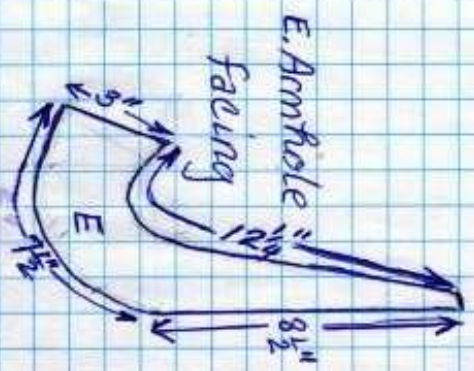


II Dhonka Diagram II.2 Drawn to scale 0.5cm = 2 inches

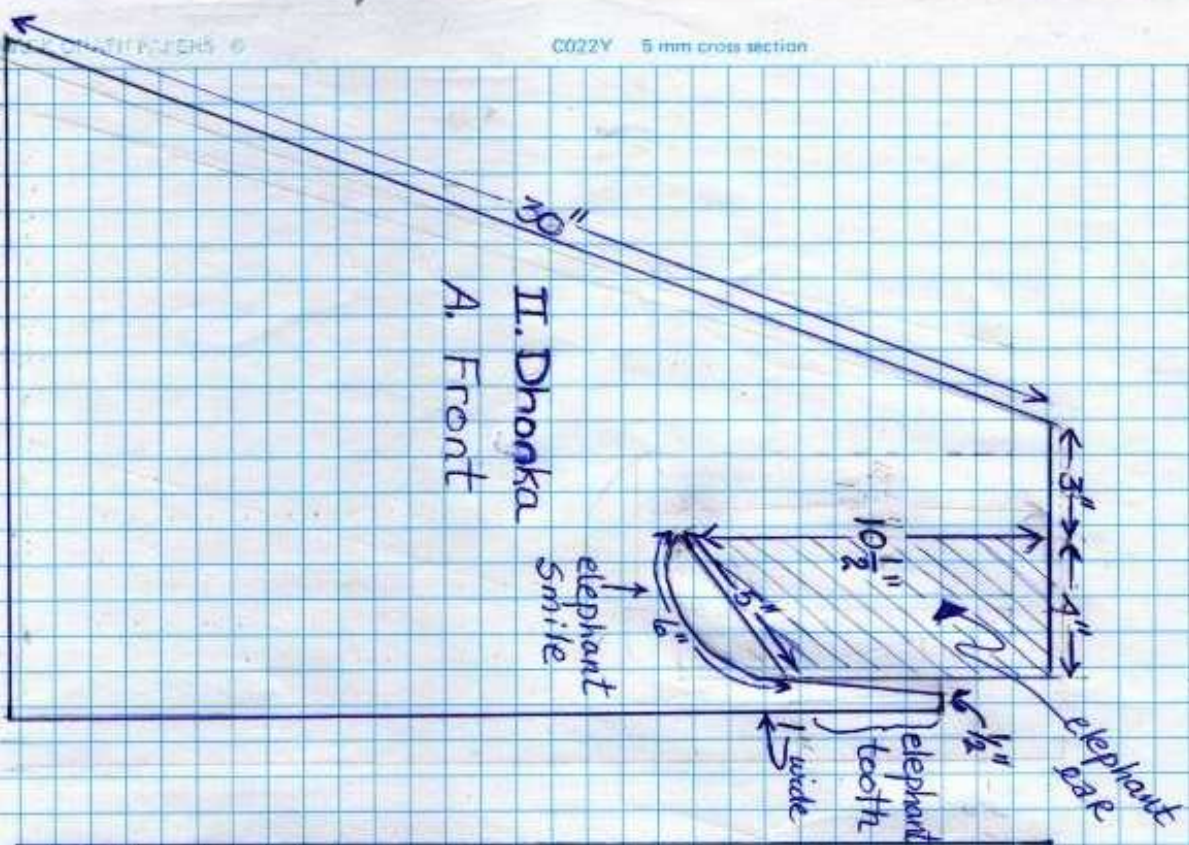

# II. Dhogka Diagram IIa (continued)

Drawn to scale:  
0,5 cm = 2 inches

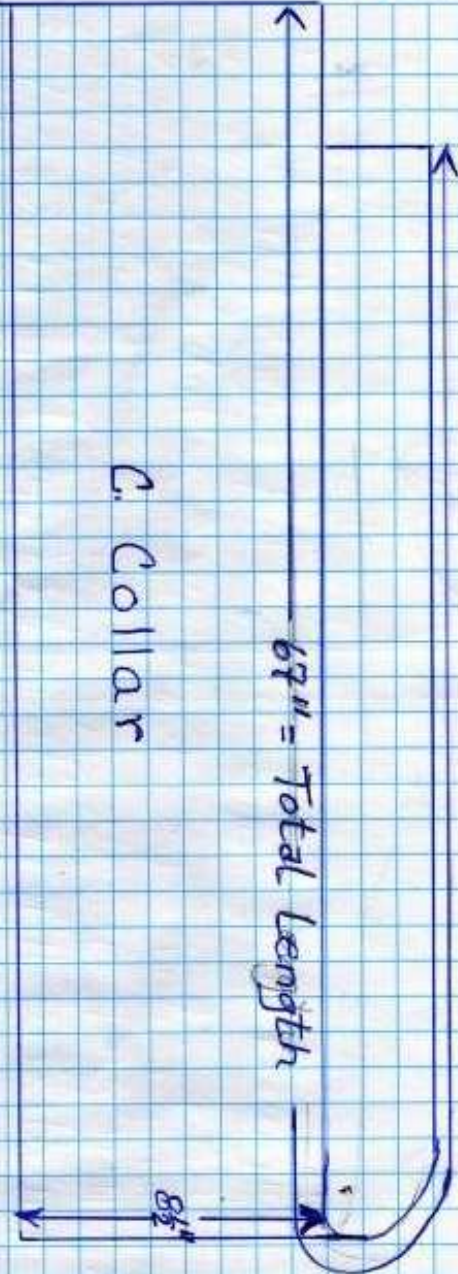

## II Dhanka


### Diagram IIb. Layout & Cutting of Pieces

(Note: Collar not shown. For Collar, cut one piece  $8\frac{1}{2}'' \times 67''$  (on fold, cut  $33\frac{1}{2}'' \times 8\frac{1}{2}''$ )


Material required:  $45''$  wide  $\times$   $56''$  long

plus material for collar (as above)

Drawn to scale :  $0.5\text{cm} = 2$  inches

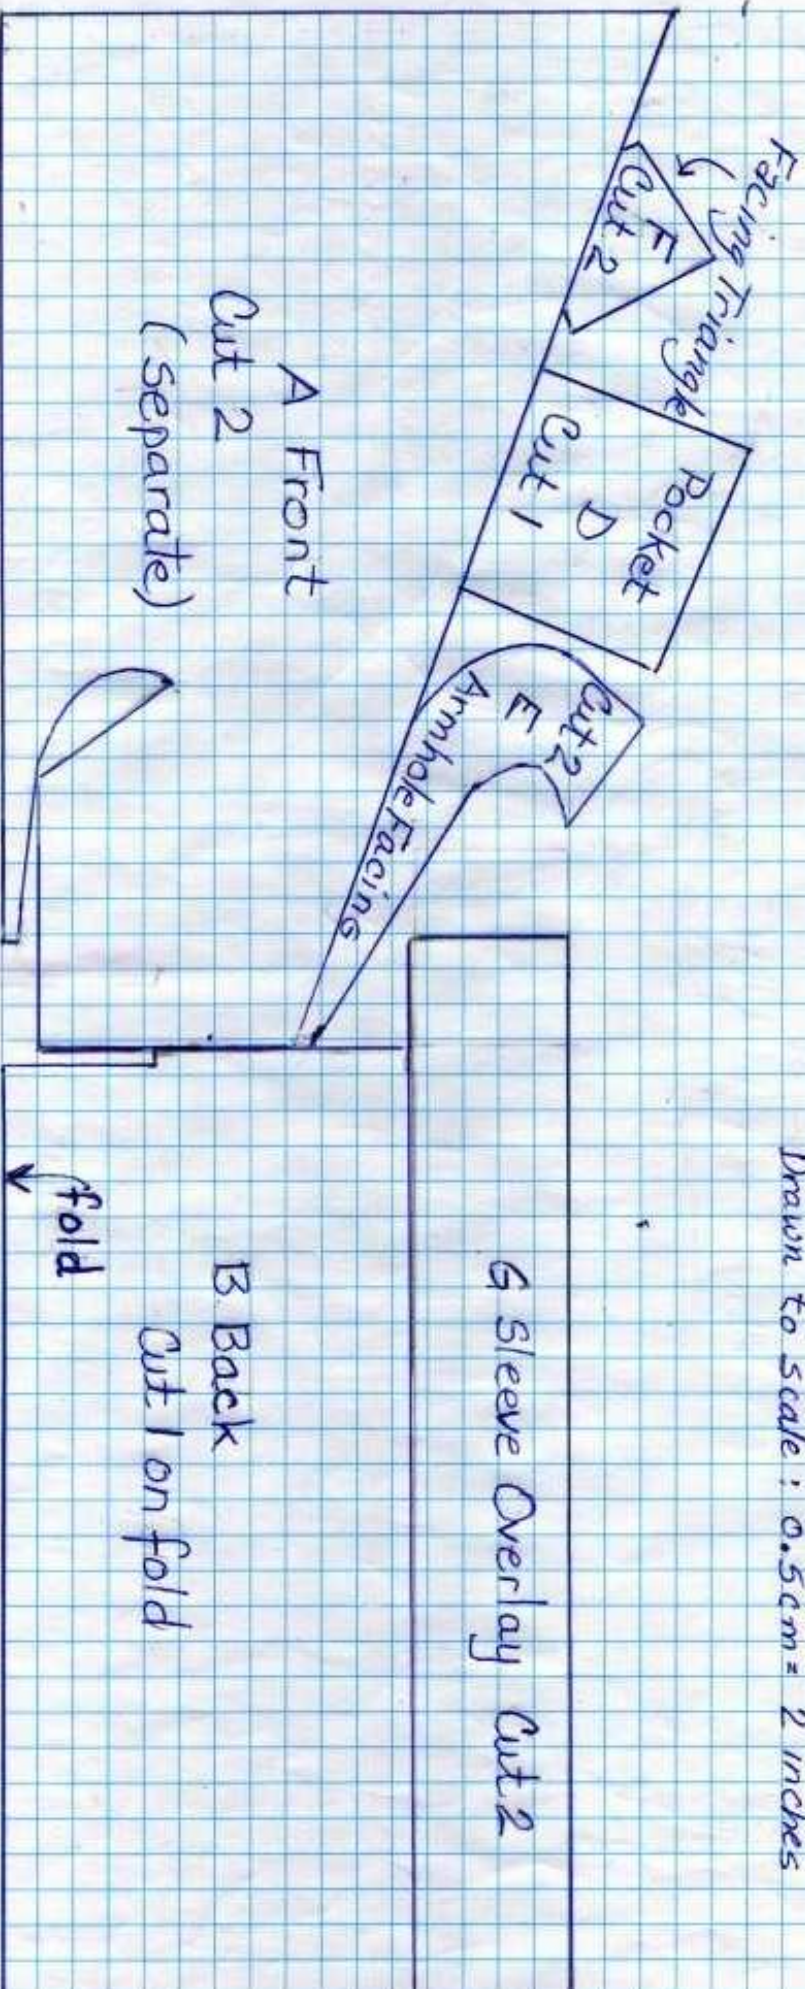


II.c DHONKA ARMHOLE FACINGS Drawn to scale, 0.5cm = 2inches

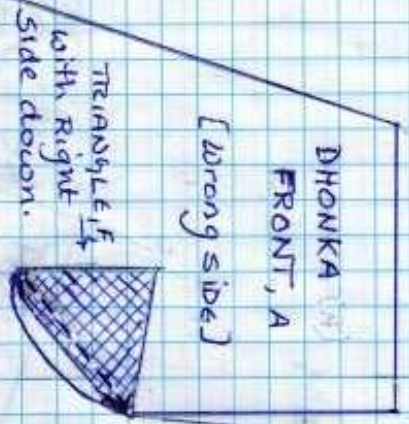


#1 Place Right Side of triangle F, face down on Wrong side of DHONKA FRONT (Wrong side of triangle will face up - indicated by shading).  
 Stitch a 1" seam as indicated along the edge of sleeve as shown.  
 Turn Triangle down, then with DHONKA front still wrong side top stitch the seam.



#2 Turn DHONKA FRONT Right side out. The raw edges of the seam that you just sewed will be seen on this side.  
 These raw edges will be covered by the shoulder overlay, later

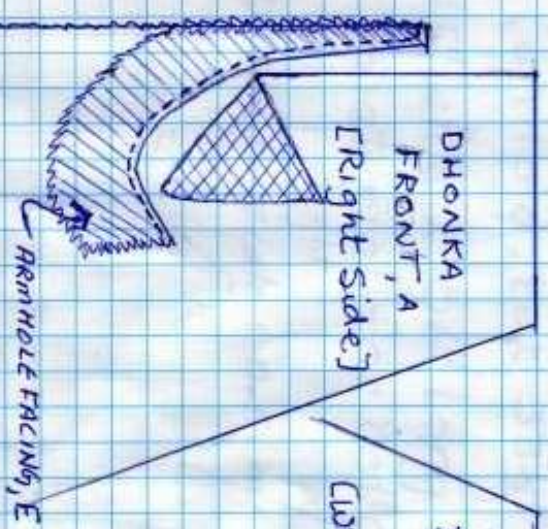


#3 Fold triangle up and out of the way. Match right sides of armhole facing with right side of armhole of front of DHONKA.  
 Stitch top and inner curve of the facing to the front armhole as indicated by stitching lines.

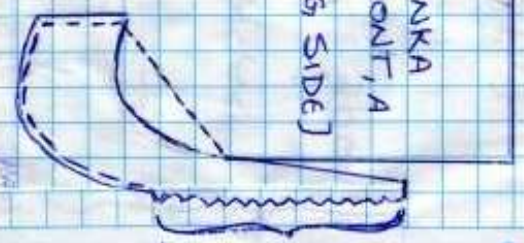


#4 Turn facing to inside of front. Turn under 1" of unsewed left and bottom edges and stitch close to edge, as shown.  
 Repeat for other side.

# II. D Dhanka OVERLAP SEAM TECHNIQUE ~ Joining Shoulder Seams

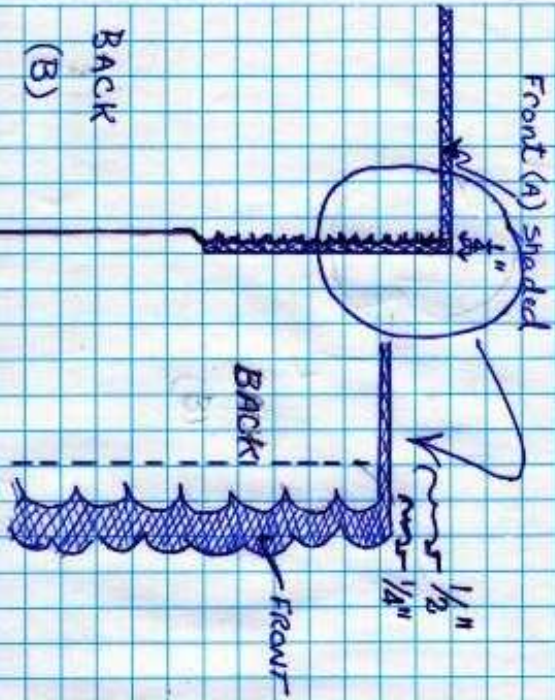


① With wrong sides together, lay the Back panel on top of the Front, leaving the Back 1/4" short of meeting the Front edge.  
 Stitch a 1/4" seam, as measured from the edge of the Back panel (equals 1/2" from edge of Front.)

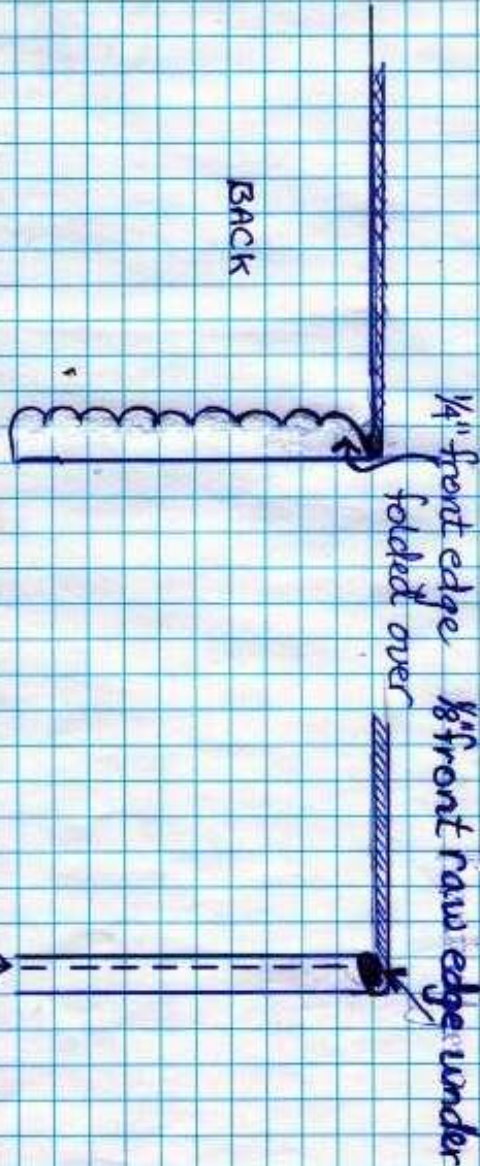

② fold over raw edge of Front. = 1/4"  
 stitching line close to edge.  
 ③ Tuck raw edge under. 1/8" (of 1/4")  
 ④ Stitch close to edge.

## II DHONKA DIAGRAM II.F SLEEVE OVERLAY

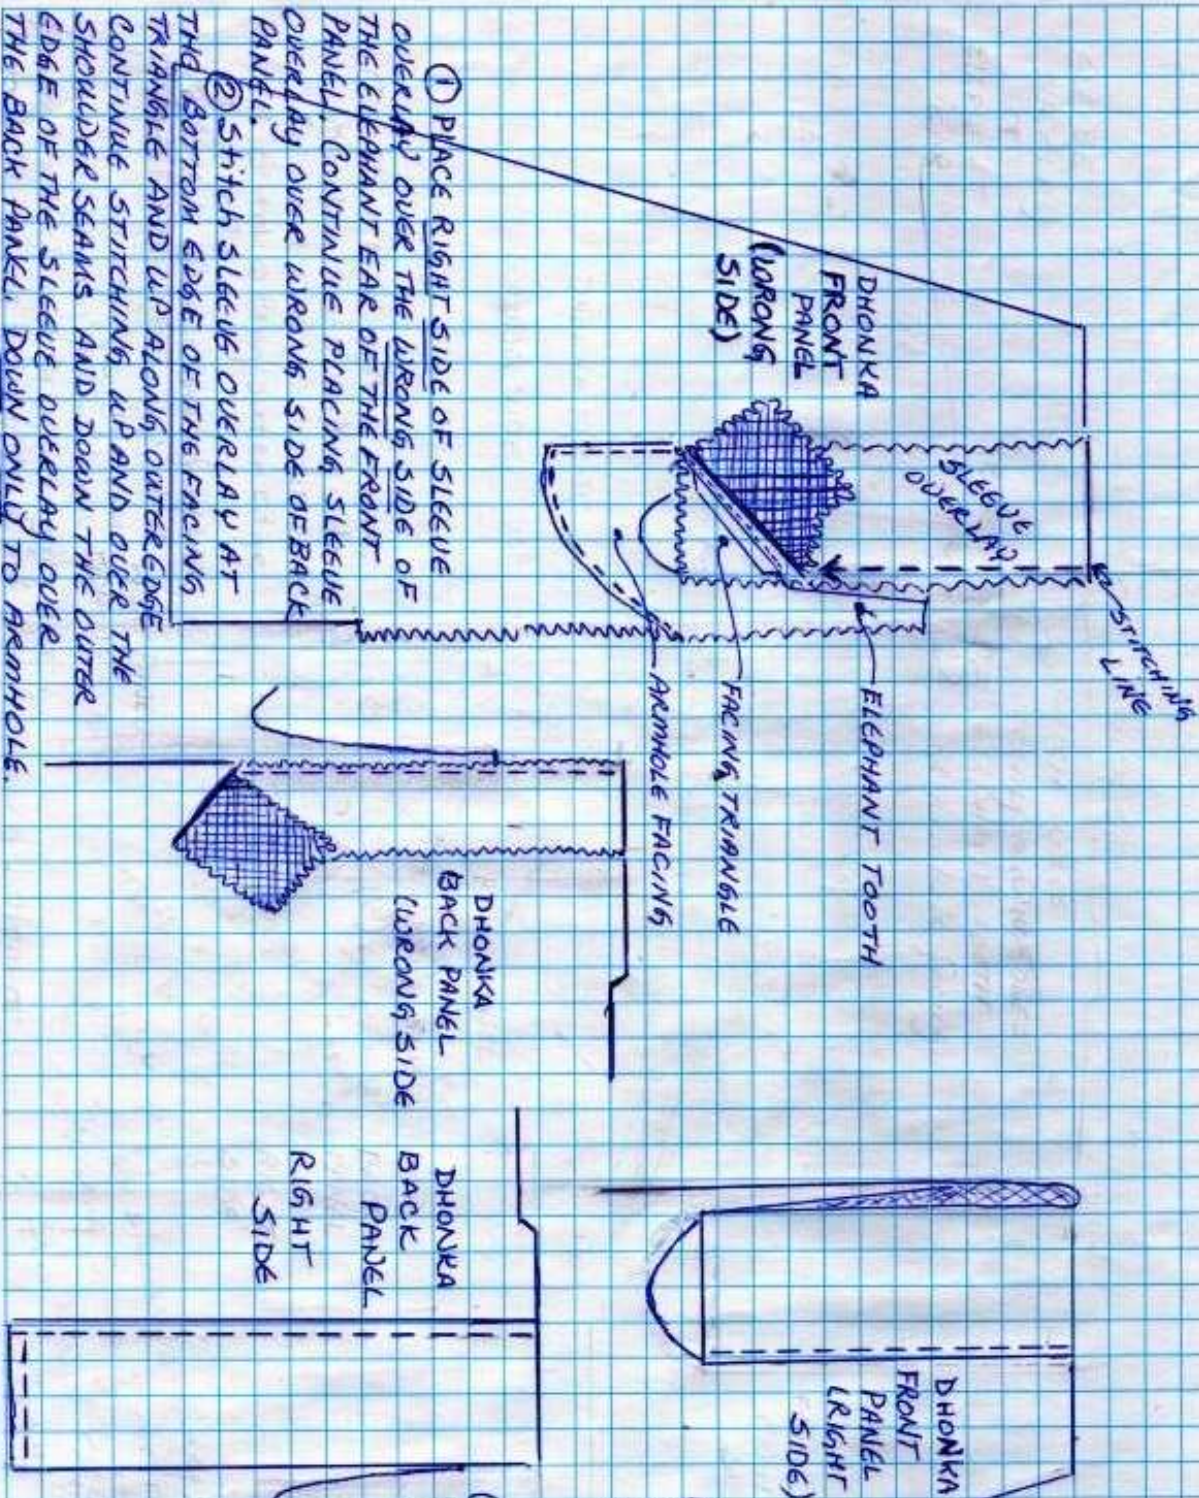

① PLACE RIGHT SIDE OF SLEEVE OVERLAY OVER THE WRONG SIDE OF THE ELEPHANT EAR OF THE FRONT PANEL. CONTINUE PLACING SLEEVE OVERLAY OVER WRONG SIDE OF BACK PANEL.

② Stitch SLEEVE OVERLAY AT THE BOTTOM EDGE OF THE FACING TRIANGLE AND UP ALONG OUTER EDGE CONTINUE STITCHING UP AND OVER THE SHOULDER SEAMS AND DOWN THE OUTER EDGE OF THE SLEEVE OVERLAY OVER THE BACK PANEL. DOWN ONLY TO ARMHOLE.

③ Turn Sleeve Overlay to outside.


④ Turn FRONT AND BACK PANEL RIGHT SIDE OUT


NOTE HOW THE RAP EDGES OF THE ELEPHANT'S TOOTH AND ARMHOLE FACING ARE NOW COVERED BY SLEEVE OVERLAY.

⑤ Fold under 1/4" OF UNSewn EDGES OF SLEEVE OVERLAY ON FRONT AND BACK. PIN. PRESS


⑥ HEM BOTTOM OF SLEEVE OVERLAY SO THAT IT JUST CODERS RAW EDGES OF FRONT AND BACK SIDE SEAMS ~ ABOUT 10" FROM THE BOTTOM OF THE BACK PANEL. PIN. PRESS. STITCH FRONT, BACK, AND BACK BOTTOM EDGE OF SLEEVE OVERLAY.

II DHONKA Diagram II.g BLUE CORD & BLUE STITCHING

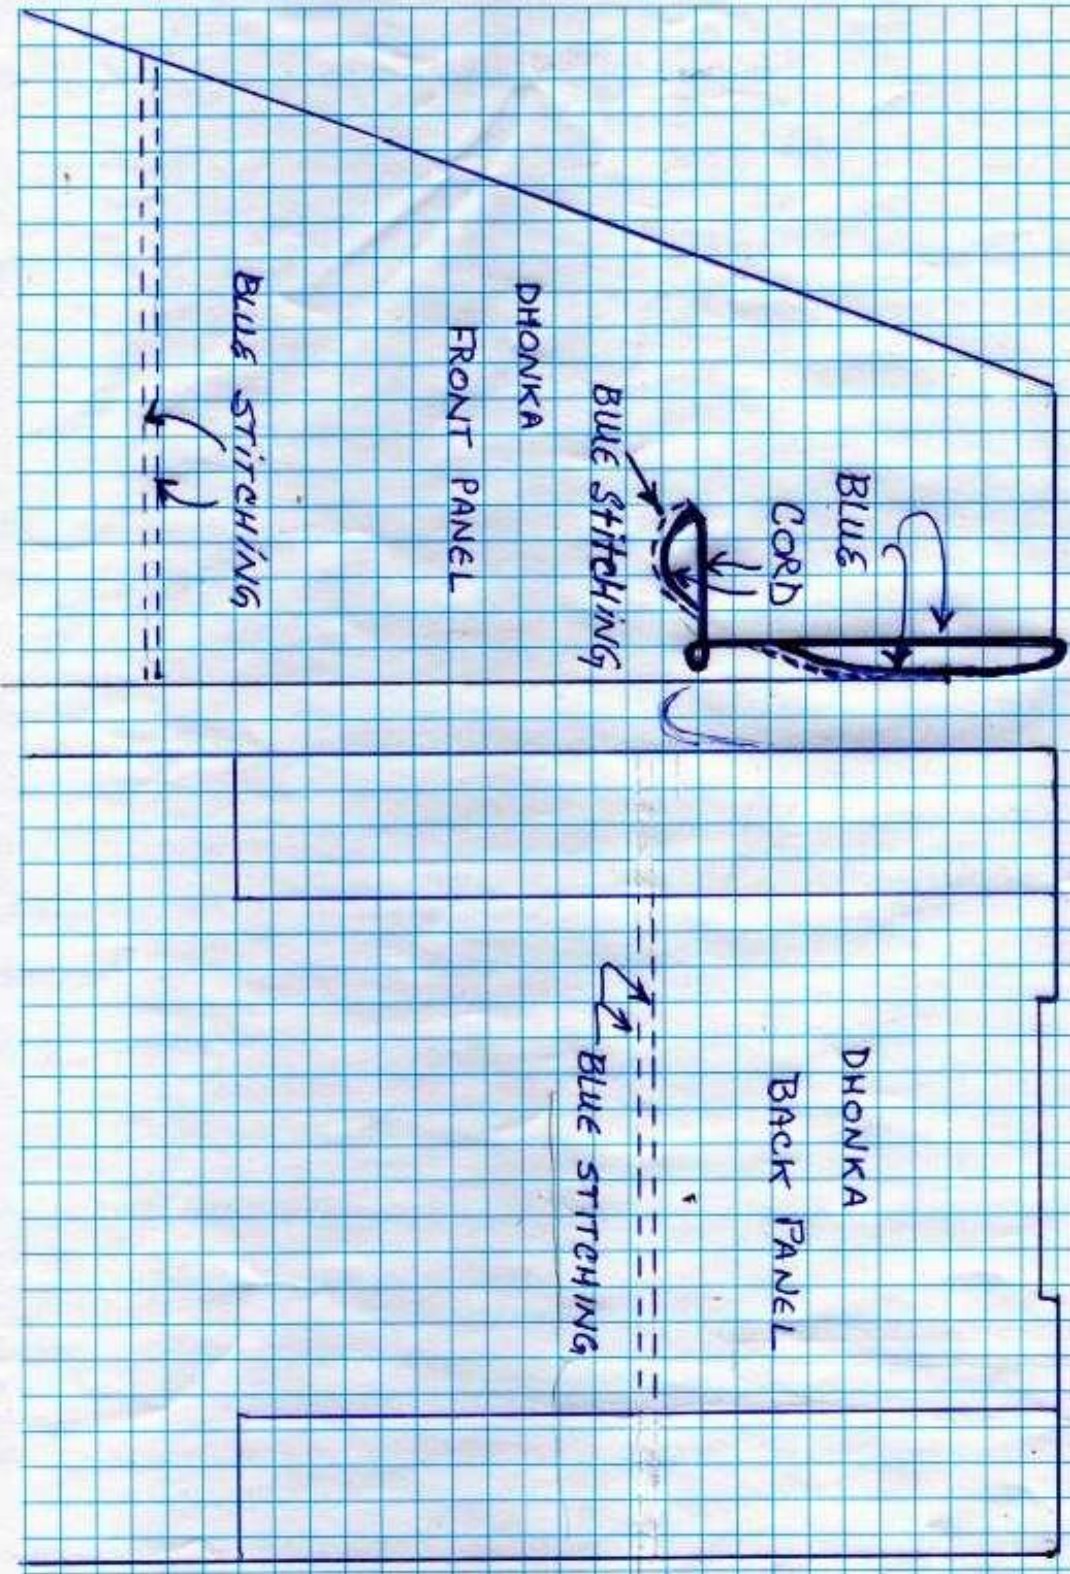

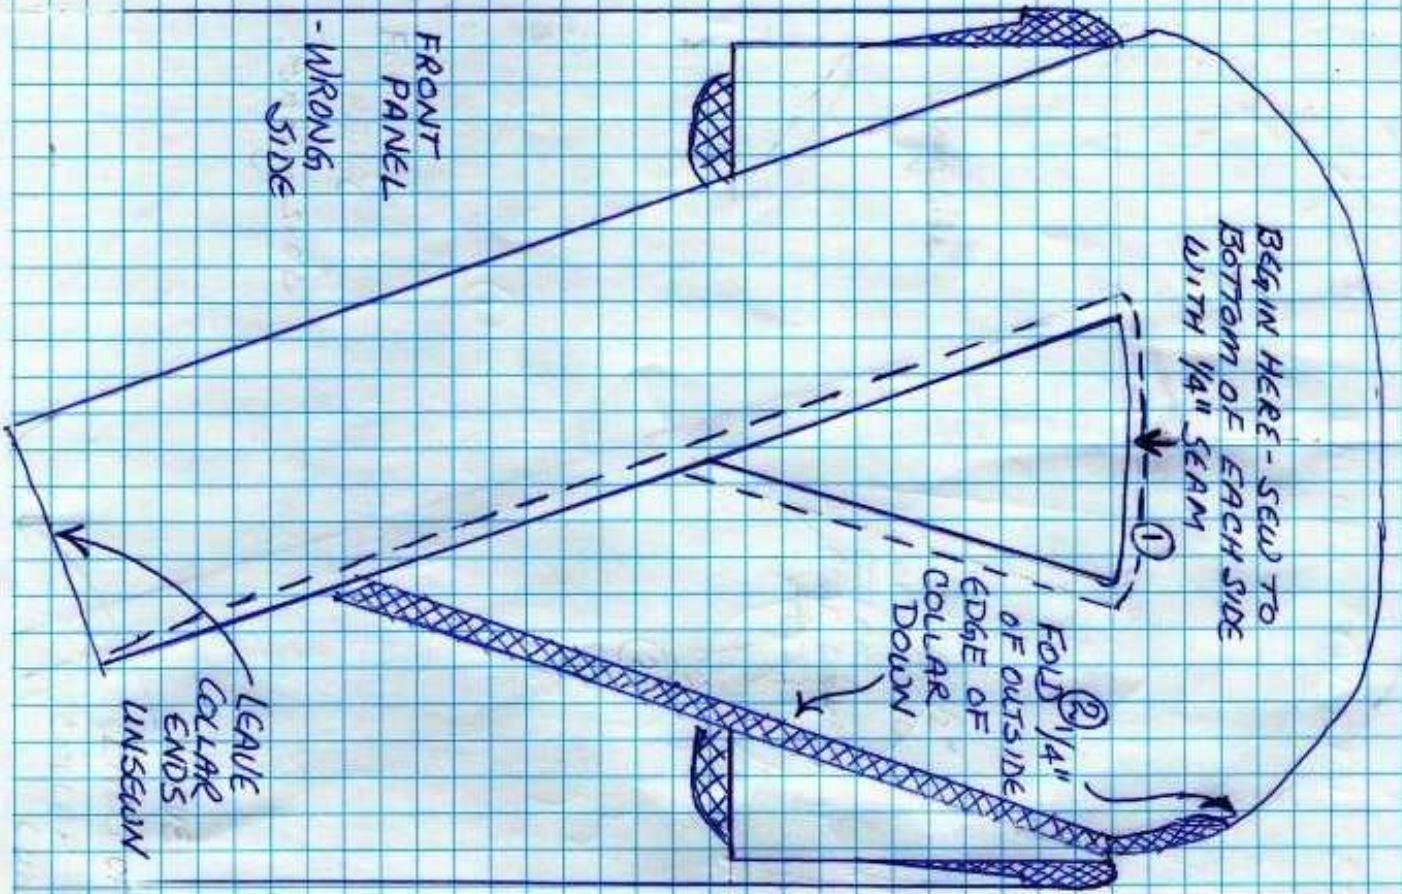


II DHONKA  
DIAGRAM II.h - COLLAR

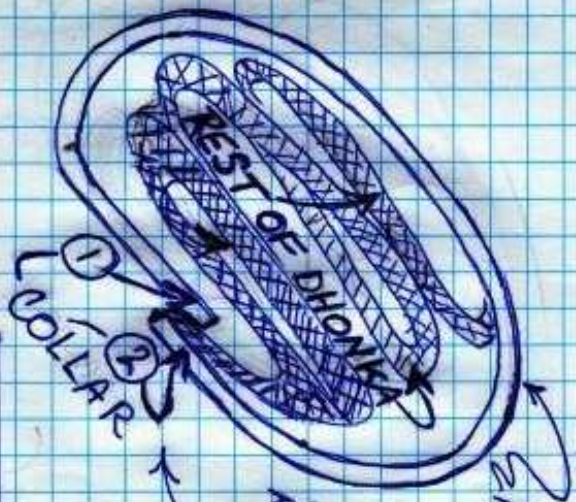



Roll UP THE REST OF THE DHONKA SO THE SECOND EDGE OF THE COLLAR COMES AROUND TO MEET THE OUTER EDGE OF THE GARMENT WITH THE DHONKA ROLLED UP IN BETWEEN.

After sewing, as before the second edge, pull the rest of the DHONKA OUT THROUGH THE BOTTOM OPENING OF ONE SIDE BY INVERTING OUTWARD. PRESS. FOLD COLLAR IN HALF LENGTHWISE

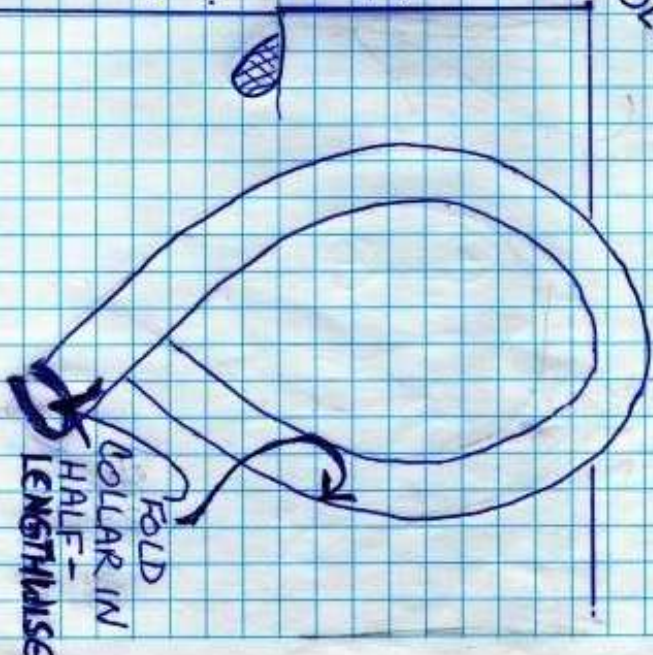




Enlargement

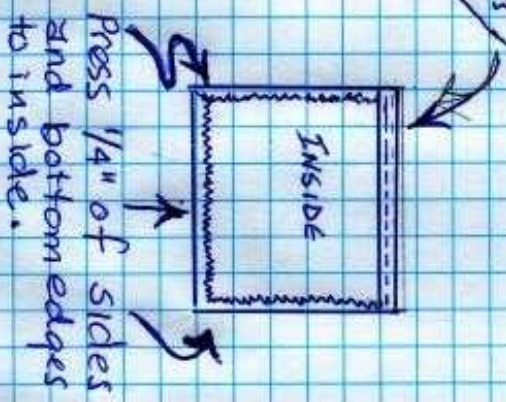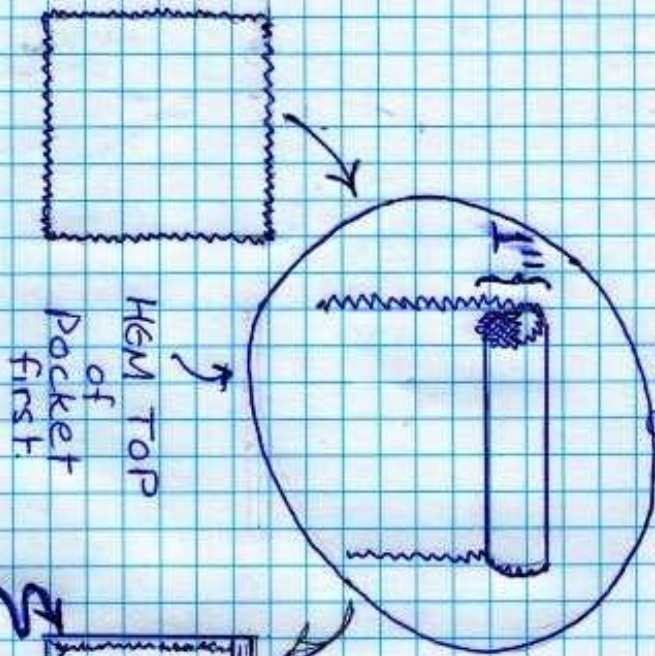



## II. DHONKA II.i ~ Pocket

Pocket goes ON INSIDE OF FRONT LEFT PANEL JUST BELOW ARMHOLE FACING. DOUBLE STITCH SIDES AND BOTTOM OF POCKET. PRESS

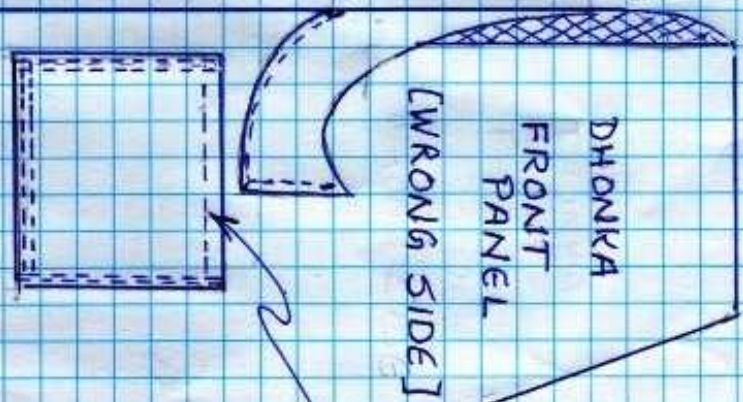


Top previously stitched in hemming

II DHONKA DIAGRAM II. j 2- Colored DHONKA

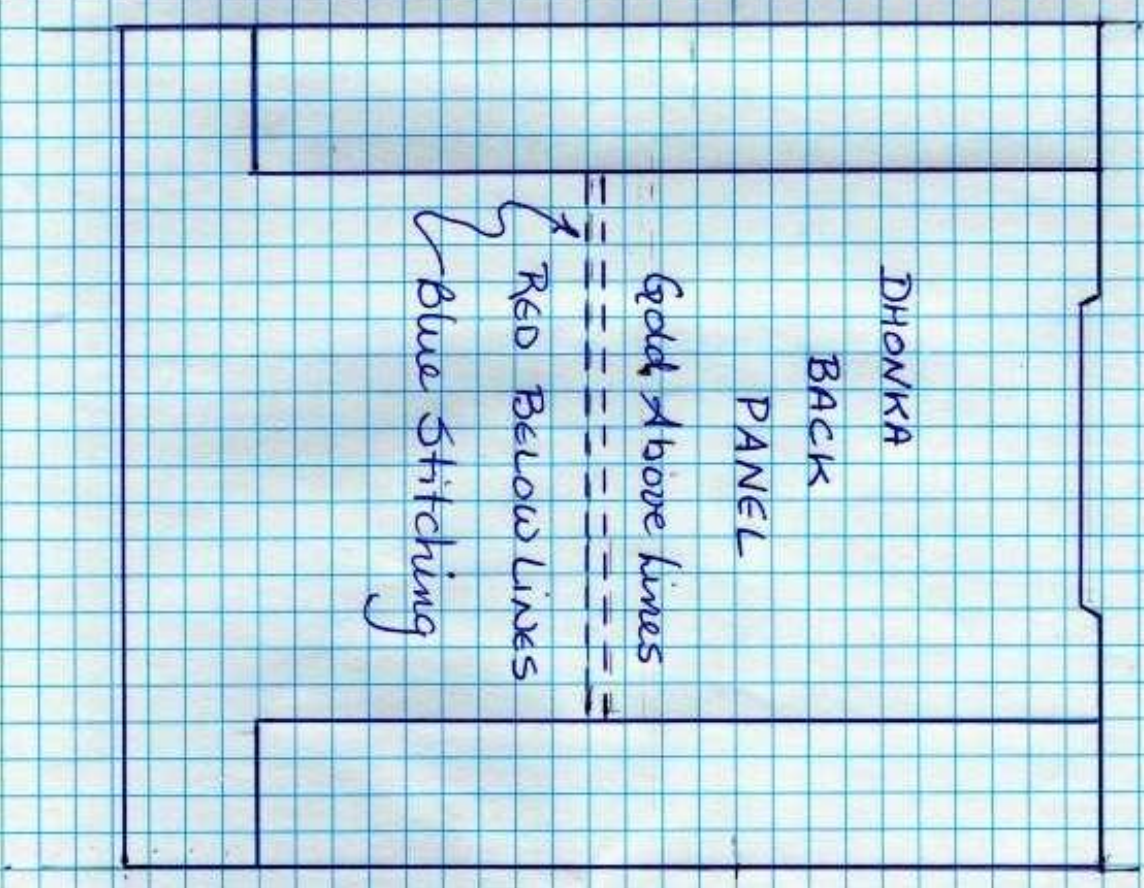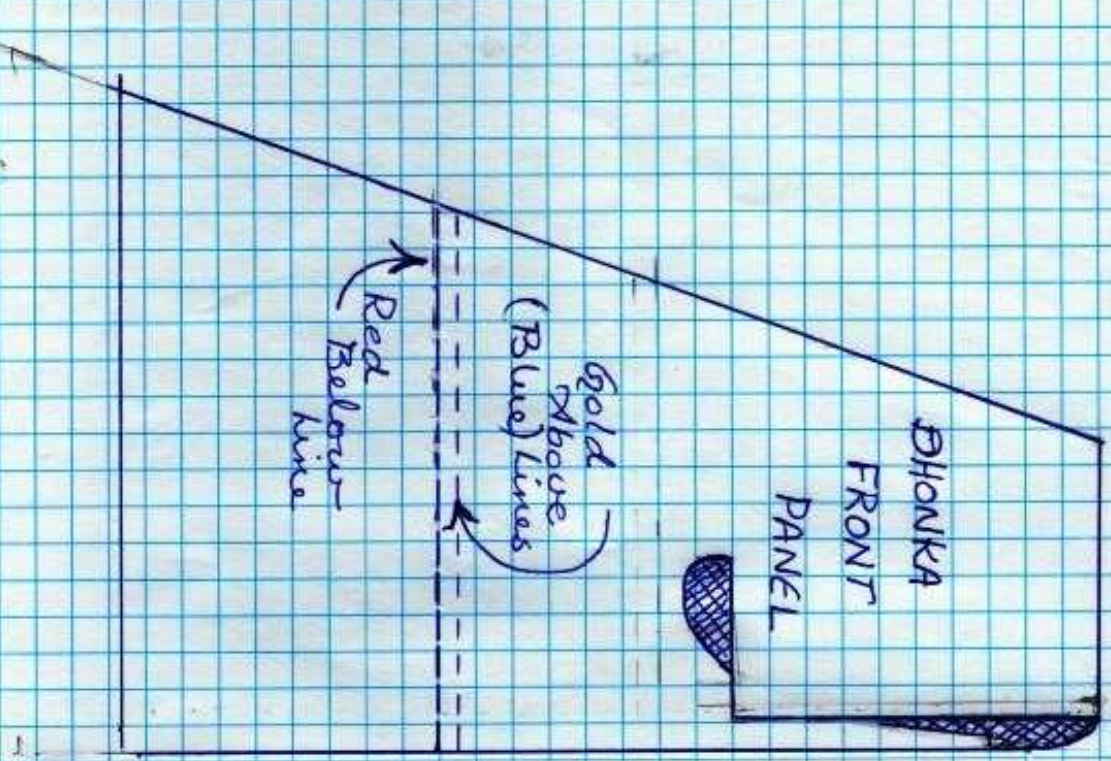

# II DHONKA DIAGRAM II.e SIDE SEAMS & BOTTOM HEM

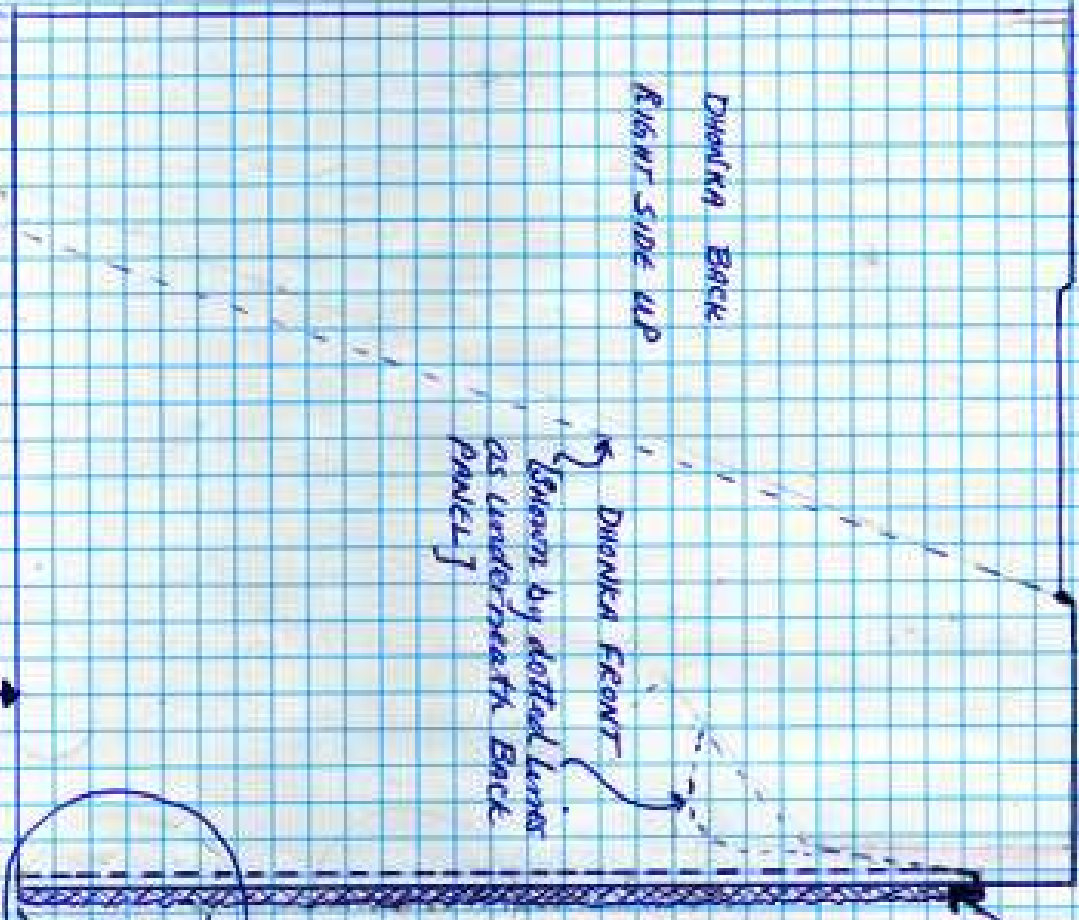

FRONT EDGE 11" (NOT AT ALL)


① Stitch Wrong Sides Together  
 keep Back Panel edge 5/8" of the Front Panel edge by 1/4"

② Stitch a 1/4" seam, using the Back Panel edge as a guide

NOTE: CAREFULLY SET ELEGANT BOTH, LEAVING RAW EDGES TO OUTSIDE OF GARMENT.

③ Measure 11" up from bottom. Using Overlap Technique, fold over 1/8" of front raw edge

11" and again 1/8" to form a finished SEAM AS SHOWN IN INSET

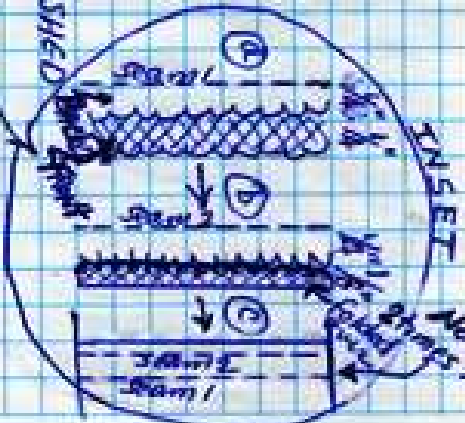

NOTE: 11" IS TO BE MEASURED ON INSIDE

④ Hem Bottom Edge By folding 1/2" to inside, then 1/4" of this 1/2" under. Stitch. Press.

SCALE: 0.5cm = 2 INCHES -